



IND TILES[®]

Elevate To The Next
Level Of Beauty



**600X1200MM
SPECIAL COLOUR**



10⁺ SURFACES

Our collection has a wide variety of styles. Variants let a customer identify their own distinctive style and taste through they want to illuminate their home decor or bring a dark marvelous touch to it. Our products have top-notch quality as special attention is given to processing and finishing through a constant upgrade in technology and innovations.

We aim to bring forward our products to compete at a global standard of lifestyle and home decor. Our perpetual determination and efforts focus on providing the world with something new and creative. Our mission is to break through the ceramic industry through our profound artistic collection.



600x1200mm

The dimension available is 600x1200 mm. This basic yet perfect size can allow various applications. Extreme attention is given to engineering and finishing. A thorough advancement is made in technology management along with a strong value of sustainability.

Our team includes great professionals that understand the organization's values and principles. Our company also aims to provide certain training and guidance to them to enhance their ability and improve their work.

APPLICATION

Our products make your home look extra spacious and grandeur. Our aim is to bring a touch of extravagance and beauty that marvels the audience and onlookers. We have several applications for indoor & outdoor spaces. Our exquisite styles are widely used to adorn the walls & embellish the floor of your household. they give a modern contemporary outlook and a serene vibe. Uplifting your lifestyle, we opt to do the impossible. We are here to amaze you By transforming the ordinary into the extraordinary. Our surfaces can adorn various residential and commercial locations beautifully.



Commercial Building



Hotel, Restoaurant



School, College



Hall & corridor



Mall & Super Market



Religious Place



Residential



Hospital



Airport




Gymnasium



Industry



Spa

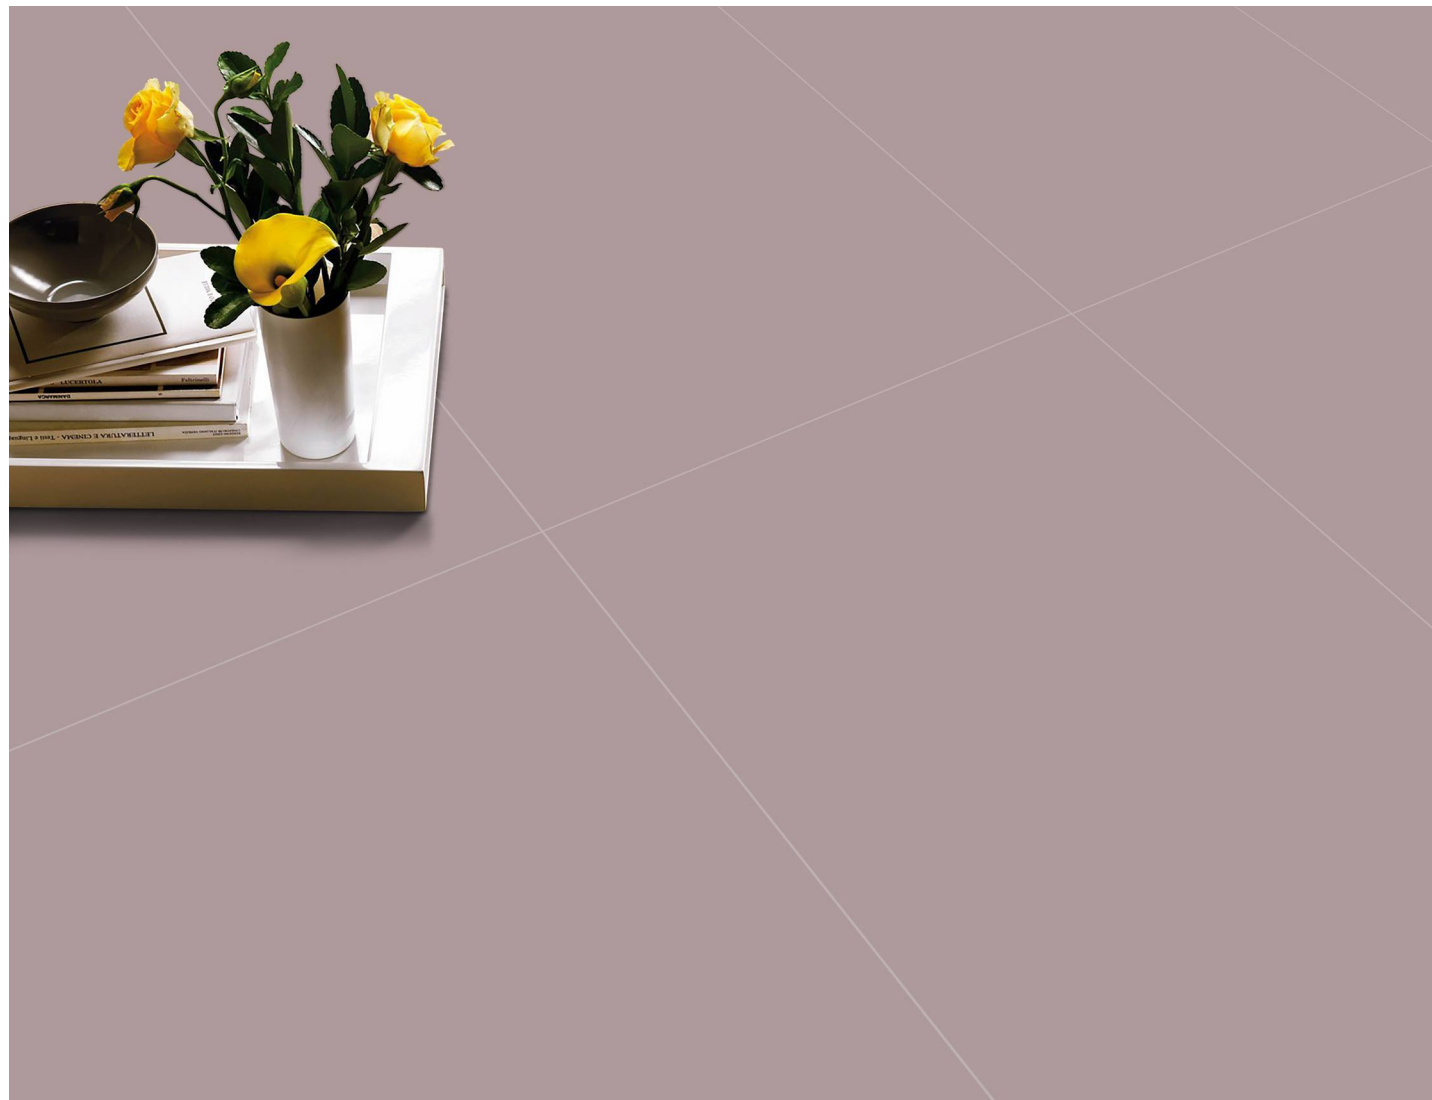

SPECIAL COLOUR

Rustic collection can be differentiated from others through its distressed finish. Our finish signifies excellence and brings its quality to international standards in the ceramic industry. The feel of the surface is distinctive and utterly divine. It instills an ecstasy feeling through its exquisite finish.

The products are processed under state-of-the-art technology and profound management. It lets you indulge in the essence of nature-like decor in your surroundings - residential and commercial. Our rustic collection showcases the advancement of technology and creativity in ceramic industry.

Interactive Guide



Please Click


To view specific tile information in detail, please click on the corresponding tile picture.



Click on the logo

To return to the previous index page, you shall click on the logo.

- 1 Chisel Crepe
- 2 Praga Blue
- 3 Pulpis Teal
- 4 Rhodonite Fossil
- 5 Sandhan Grey
- 6 Slater Coal



9 MM
Thickness



Chemical
Resistant




Impact
Resistant



Weather
Pro



Anti-
bacterial



Easy
Clean



Stain
Resistant

CHISEL CREPE

Surface : Special Colour | Size : 600x1200mm | Random : 1





CHISEL CREPE




9 MM
Thickness



Chemical
Resistant




Impact
Resistant



Weather
Pro



Anti-
bacterial







Easy
Clean



Stain
Resistant

PRAGA BLUE

Surface : Special Colour | Size : 600x1200mm | Random : 1





PRAGA BLUE



9 MM
Thickness



Chemical
Resistant




Impact
Resistant



Weather
Pro



Anti-
bacterial



Easy
Clean



Stain
Resistant

PULPIS TEAL

Surface : Special Colour

Size : 600x1200mm

Random : 1





PULPIS TEAL



9 MM
Thickness



Chemical
Resistant



Impact
Resistant



Weather
Pro



Anti-
bacterial



Easy
Clean



Stain
Resistant

RHODONITE FOSSIL

Surface : Special Colour


Size : 600x1200mm

Random : 1





RHODONITE FOSSIL



9 MM
Thickness



Chemical
Resistant




Impact
Resistant



Weather
Pro



Anti-
bacterial



Easy
Clean



Stain
Resistant


SANDHAN GREY

Surface : Special Colour | Size : 600x1200mm | Random : 1





SANDHAN GREY




9 MM
Thickness



Chemical
Resistant




Impact
Resistant



Weather
Pro



Anti-
bacterial





Easy
Clean



Stain
Resistant

SLATER COAL

Surface : Special Colour | Size : 600x1200mm | Random : 1





SLATER COAL

Technical Specification

Dimensions & surface Quality

Characteristic	Group Bia – ISO 13006/EN-176	Group Bia IS :15622:2017	Value	Test According to
Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
Deviation in thickness	± 5%	± 4%	± 4%	ISO 10545:2/IS:13630 (P-1)
Deviation in Straightness of sides	± 0.5%	± 0.4%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
Deviation in Rectangularity	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
Deviation in Surface Flatness	± 0.5%	± 0.2%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
Surface Quality & Color (%)	Minimum 95% Declared by manufacture	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
Glossiness with Nano		-	Above 90	ISO 2813 (Glossy meter)

Physical characteristics

Characteristic	Group Bia – ISO 13006/EN-176	Group Bia IS :15622:2017	Value	Test According to
Scratch Hardness of surface Moh's scale	Min. 3	Min. 3	Min. 3	EN-101/IS:13630 (P-13)
Water absorption	≤3%	Min. 3	≤3%	ISO 10545:3/IS: 13630 (P-2)
Moisture Expansion	Nil	-	Nil	ISO 10545:10
Surface Abrasion	Required	Required	PEI 2 – 4	ISO 10545:7/IS:13630 (P-12)

Mechanical characteristics

Characteristic	Group Bia – ISO 13006/EN-176	Group Bia IS :15622:2017	Value	Test According to
Breaking strength	1300 N	Min 1300 N	≥ 1800 N	ISO 10545:4/IS: 13630 (P-6)
Modulus of rupture	>35 N/mm ²	Average 35, Individual minimum 32	≥ 35 N/mm ²	ISO 10545:4/IS: 13630 (P-6)

Safety characteristics

Characteristic	Group Bia – ISO 13006/EN-176	Group Bia IS :15622:2017	Value	Test According to
Density	2.20 gm/cc	Min 2.20 gm/cc	2.20 gm/cc	DIN 51082/IS: 13630 (P-2)
Skid resistance (Friction coefficient)	≥0.4	-	≥ 0.4	ISO 10545:17

Thermo photo characteristics

Characteristic	Group Bia – ISO 13006/EN-176	Group Bia IS :15622:2017	Value	Test According to
Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545:9/IS: 13630 (P-5)
Co efficient of thermal expansion	9×10-6K-1Max	6×10-6K-1Max	<6×10-6K-1 Max	ISO 10545:8/IS:13630 (P-4)
Frost resistance	Resistant	Required	Need to comply with the standard	ISO 10545:12/IS: 13630 (P-10)
Color Resistance to UV light	Resistant	-	Resistant	DIN 51094

Chemical characteristics

Characteristic	Group Bia – ISO 13006/EN-176	Group Bia IS :15622:2017	Value	Test According to
Stain Resistance	Min class-3	Required	Min conform to class-3*	ISO 10545:14
Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-UA*	ISO 10545:13/IS:13630 (P-7)
Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-ULA*	ISO 10545:13/IS:13630 (P-7)
Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-UHB	Required	Conform to classes-UHA*	ISO 10545:13/IS:13630 (P-7)

DOMESTIC PACKING DETAILS

Dimensions (mm)	Thickness (mm)	Pieces Per Box	Coverage Area (sqm.) (sqft.)		Box Weight (kg)
600x1200	9	02	1.44	15.50	29 (Approx)

NOTE :

- Colours in the catalogue are as accurate as printing process allows. Please check actual tile sample before making the final selection.
- Sizes mentioned in the catalogue are nominal sizes only.
- For better laying. Please follow the instructions on the packaging box.
- Please make sure to check the shade/finish with the sales agent/ dealer making the final purchase because there might be variation in actual finish that shown in the catalogue. The company will not bear any loss in such case.



Thank you !